



access control
868 MHz MOTION range

Applicable to doors
roller · tilting · sliding
hinged · sectional · guillotine
rapid · glass · barrier · revolving doors
bollards

ACCESS-5K

868 MHz access
control unit




jcmtechnologies
be a step ahead with technology and imagination

Access control unit with time
scheduling for small installations



ACCESS-5K

ACCESS CONTROL

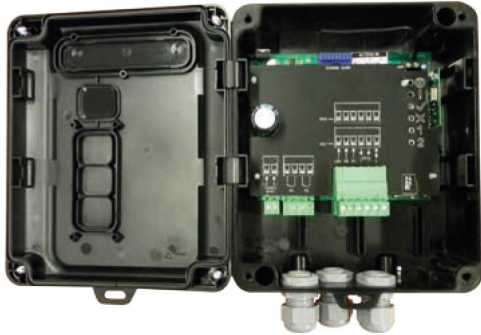

ACCESS-5K

- 868 MHz access control, 2 relays, 5,000 codes.
- Outputs: 2 relays assignable to specific time slots per user or group of users.
- Micro SD extractable memory included.
- Power supply: 12/24V AC/DC, with a capacity for up to 2 proximity readers connected directly to the equipment.
- Recommended cable lengths: cable sections of 0.22/0.35/0.5 mm² to 100/150/200m respectively using CAT5 cable.
- Clock and calendar to store the time and date.
- IP65.
- Adding an additional power source will give you a capacity of up to 20 readers on the same network (BUS-L only).
- Front cover with hinges to prevent from falling if opened.
- Box size 152 x 180 x 85 mm.

Remote maintenance (optional)

GSM card allows the maintenance of the equipment from your office, saving you both time and travel expenses.
M2M service needed (available from JCM).

APPLICATIONS

Without GSM-CARD:

Access control for small installations from a front desk: main door of an office, gym, social club...

