

KC 01

KEEcontrol

KEEroll

Residential single-phase control panel



Applicable to  
roller shutters



jcmtechnologies

## KEEroll

### Actions

-  Open door
-  Stop door
-  Close door
-  Dead man closing
-  Courtesy light management
-  Block
-  Transmitters management



### Indicators

-  Emergency stop
-  Low battery
-  Communication error
-  Internal error/maintenance
-  Active photocell
-  Active security



### technical features

- Control panel for residential roller shutter.
- 868 MHz receiver, 27 codes.
- Built-in receiver for safety system : compatible with RSens3 / RBand 3 systems.
- Power supply: "fast connection" system.
- 230V / 1,2kW single-phase.
- Pluggable connectors.
- Operating temperature: -20°C to +55 °C.
- IP44.

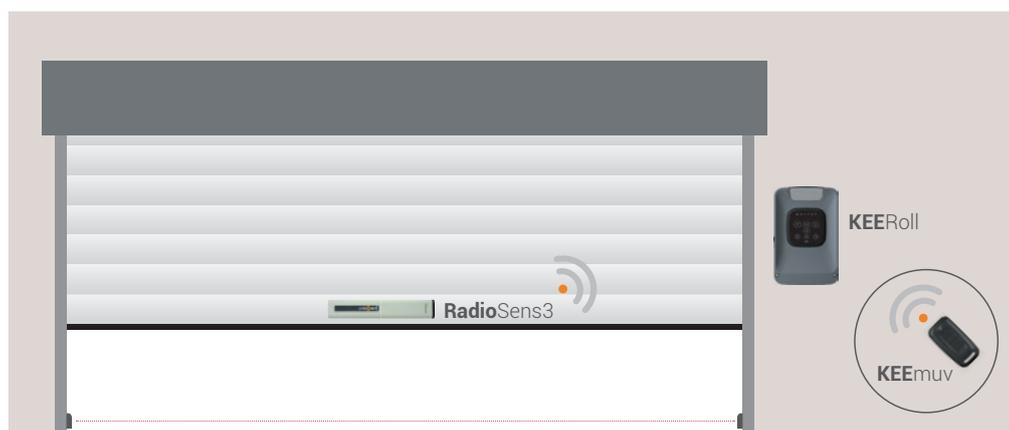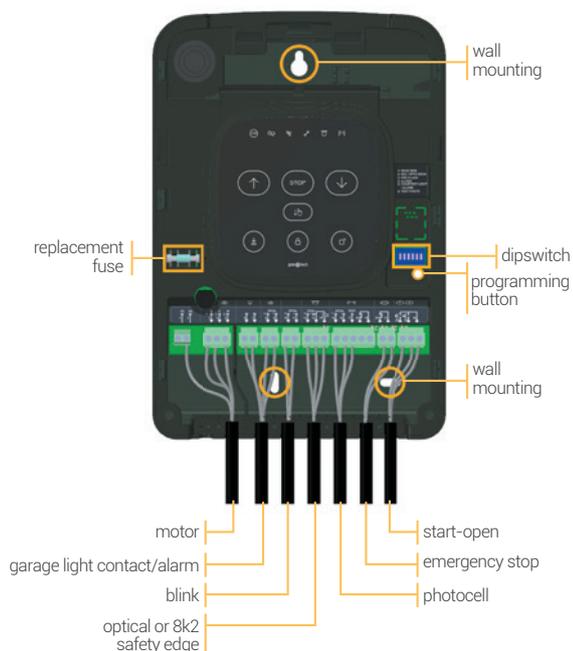

KEERoll application in roller shutter with RSens3 system (without safety edge).